

technogrid®


DATA SHEET




Force/energy/size relationships are not limited to what is illustrated here. For special requirements or further information please contact Horne or your local agent.

Some typical force/energy/stroke relationships are shown on the 120kJ **Technogrid®** graph. eg. using the 120kJ unit, the correlation energy (75kJ), end force (235kN) and stroke of 475mm indicated.


12 kJ Double Bar Technogrid

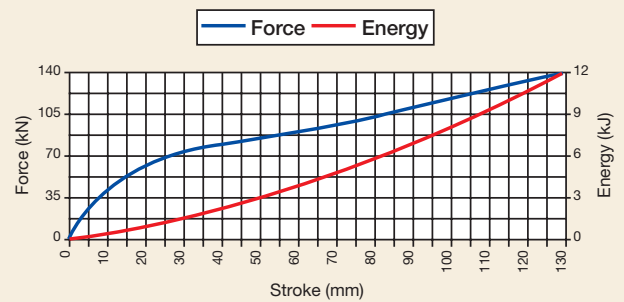


24 kJ Double Bar Technogrid

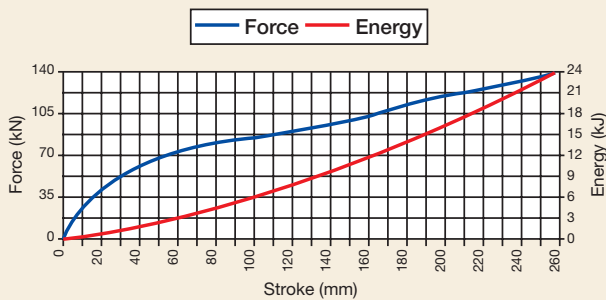


60 kJ Double Bar Technogrid

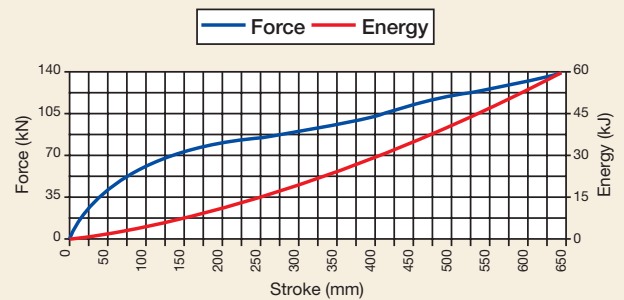

48 kJ Double Bar Technogrid

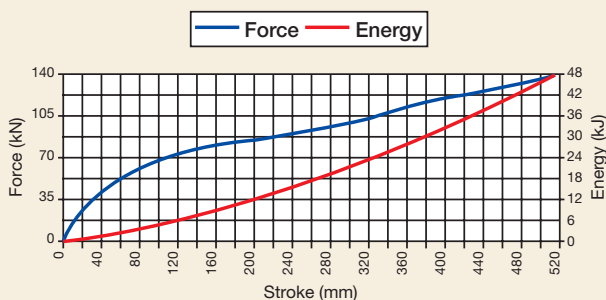

120 kJ Double Bar Technogrid

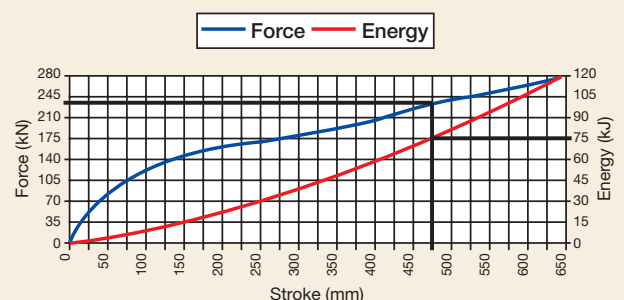

225kJ **Technogrid®** used for overwind and underwind impact protection (encased in steel cover)

technogrid[®]

Always use M24 Grade 8.8 bolts
for installing the technogrids[®]

